


LCD 55" Video Wall Display

Sharp MultiSync® UN553V

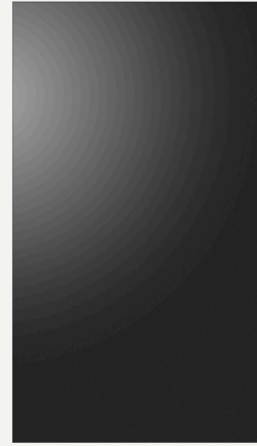

Seamless video walls to amplify your brand

Scale up your visual impact with the modular Sharp MultiSync® UN Series, purpose-designed with ultra-narrow bezels to create high-resolution video walls with minimal image interruption.

Advanced intelligent features and imaging performance powered by SpectraView™ ensure precise and consistent visualisation across the entire wall, creating the impression of a single, continuous surface for clear and engaging content presentation.

Engineered for 24/7 operation in public spaces, the series combines robust metal construction with advanced thermal management to deliver reliable, long-lasting performance.

The 55-inch Sharp MultiSync® UN553V draws on its heritage of engineering excellence to deliver a premium experience yet at remarkable value. Positioned to fulfil the requirements of demanding signage applications, it is suited for retail environments, digital-out-of-home media, leisure and museum venues, as well as rental and staging scenarios.

Benefits

Easy installation – effortless set up with Auto TileMatrix and out-of-the-box calibration. Ready-to-use image presets save time for predefined application scenarios.

Enhanced imaging performance – advanced settings of all relevant visual parameters allow full control of brightness, colour, gamma and uniformity via the SpectraView Engine for precise, natural images.

Lifelike and consistent colour – experience true to life colour reproduction with IPS panel technology. Uniform visibility is maintained in both landscape and portrait orientation, as well as at wide viewing angles as viewers pass by.

Secure reliability and longevity – The metal chassis aids natural heat dissipation while the unique heat management system allows users to monitor and control internal temperatures, safeguarding components against heat build-up.

Cost Saving Device Management – save effort whilst managing all connected Sharp and legacy devices from a centralised location by using the NaViSet Administrator 2 software tool.

Specifications

Product Information

Product Name

Sharp MultiSync® UN553V

Model

PN-UN553V

Product Group

LCD 55" Video Wall Display

Order Code

PNUN553V

Display

Panel Technology

IPS with Direct LED backlights

Screen Size [inch/cm]

55 / 138.8

Aspect Ratio

16:9

Brightness [cd/m²]

500

Contrast Ratio (default)

> 3500:1

Viewing Angle [°]

178 horizontal / 178 vertical (typ. at contrast ratio 10:1)

Colour Gamut

72% of NTSC

Response Time (typ.) [ms]

8

Panel Refresh Rate [Hz]

60

Haze Level [%]

Pro (25)

Supported Orientation

Landscape; Portrait

Resolution

Native Resolution

1920 x 1080

Supported on DisplayPort and HDMI

1024 x 768;	1280 x 768;	3840 x 2160;
1080i;	1360 x 768;	640 x 480;
1080p;	1600 x 1200;	720p (50/60 Hz);
1280 x 1024;	1920 x 1080;	800 x 600

Supported on HDMI only

1080i (50/60 Hz)

Synchronisation Rate

Horizontal Frequency [kHz]

26 - 134

Vertical Frequency [Hz]

23 - 86

Connectivity

Input Video Analogue

1 x VGA; Composite (RCA)

Input Video Digital

1 x DVI-D (with HDCP); 1 x OPS Slot; 2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)

Input Audio Analogue

2 x 3,5 mm jack

Input Audio Digital

2 x DisplayPort; 2 x HDMI

Input Control

1 x Remote Control (3.5 mm jack); 1 x RS232; 2 x LAN 100Mbit

Input Data

1 x microSD (MediaPlayer); 1 x USB 1.0 (Downstream); 1 x USB 1.0 (MediaPlayer); 1 x USB 2.0 (Upstream); 2 x USB 1.0 (Compute Module, 1 x 5V/2A powered)

Output Video Digital

1 x DisplayPort (loop through: DisplayPort, OPS slot-in PC); 1 x HDMI (loop through: HDMI, OPS slot-in PC, Mediaplayer)

Output Audio Analogue

1 x 3,5 mm jack

Output Control

LAN 100Mbit

Calibration

Factory Calibration

Gamma; Intensity; RGB; Uniformity; White Point

Sensor Calibration (through USB)

PC-less Calibration with USB Sensor MDSV Sensor3; White Copy (post self-calibration)

Calibration with Software

Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; Update Uniformity Correction; White Point

Calibration Software

Display Wall Calibrator

Open Modular Intelligence

OPS Slot

Slot Technology: Open pluggable specification (NEC / Intel OPS standard)

OPS Max. Current / Power Consumption [A / W]

3.6 / 58

Sensors

Human Sensor

Optional, external, 4-5m range, triggered actions programmable

Temperature Sensor

Integrated, 3 sensors, triggered actions programmable

Electrical

Power Consumption [W]

140 shipping

Power Savings Mode [W]

< 0.5; < 2 (Networked Standby)

Environmental Conditions

Operating Temperature [°C]

+0 to +40

Operating Humidity [%]

20 to 80

Storage Humidity [%]

10 to 90

Storage Temperature [°C]

-20 to 60

Mechanical

Dimensions (W x H x D) [mm]

Without stand: 1,212.7 x 683.5 x 106.4

Weight [kg]

Without stand: 28.6

Bezel Width [mm]

1.1 bottom/right; 1.8 top/left; 2.9

VESA Mounting [mm]

4 holes; 400 x 400 (FDMI); M6

MediaPlayer

Supported Image Formats

JPG (baseline, progressive, RGB, CMYK); max. resolution 5000 x 5000; PNG (interlace, alpha channel); max. resolution 4000 x 4000

Supported Video Formats

MP4 / MOV / FLV (video H.264, audio MP3, AAC); max. resolution 1080p at 30 Hz, 1080i at 60 Hz; MPG (video mpeg1/2, audio mpeg audio layer2/3, AAC-LC); MP @ ML, MP @ HL; WMV (video H.264, wmv advanced L3, wmv simple / main, audio mp3 wmv std); max. resolution 1080p at 30 Hz, 1080i at 60 Hz

Supported Audio Formats

MP3 (MP3); max. bit-rate 320 kBit/s; WAV (LPCM); max. 48 kHz sampling

Available Options

Accessories

Calibration kit (KT-LFD-CC2); Feet (ST-5220); Remote control kit (KT-RC3); Speaker (SP-RM3); Wall mount (PD04VWM MFS 46-55 L/P; PD04VW QR 46-55 L/P; CK02XUN MFS 55 L/P)

OPS Slot

Intel® Atom, Celeron and Core i3, i5, i7 Slot-in PCs

Regulatory

Safety and Ergonomics

BSMI; CE; EAC; EMC Class B; FCC; PSB; RCM; REACH; RoHS; SASO; TÜV GS; TÜV S; UL/C-UL; VCCI

Pixel Failure Class

ISO 9241-307, Class 2

Green Features

Energy Efficiency

Carbon savings meter; Energy consumption: 122 kWh/1000 h; Energy efficiency class: G; Human sensor; LED backlight

Additional Features

Special Characteristics

Auto ID assignment; Auto tiling function; Automatic Alarm E-Mails; DICOM Simulation; Frame Comp; HTTP Server; Image flip; NaViSet Administrator 2 - free download; PJLink Support; TileMatrix; USB Media Player; User input priority definition; User readable log function

Colour Versions

Black Front Bezel, Black Back Cabinet

Audio

Optional Speakers (15 W + 15 W)

Plug and Play

VESA DDC/CI

Shipping Content

Display; DisplayPort Cable; HDMI Cable; LAN cable (RJ45); Power Cable

Warranty

3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension ¹

Operating Hours

24/7

¹ please refer to terms and conditions of warranty extensions



CE



RoHS



TÜV GS



RCM



VCCI

This document is © 2026 Sharp Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 28.04.2026